


Norm MEC

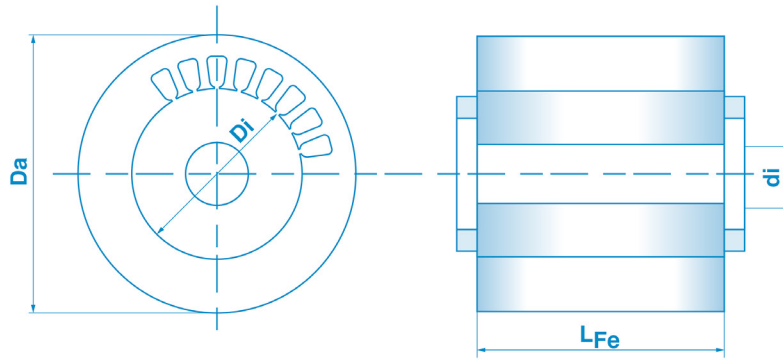

Size	2-poles 3000 rpm				4-poles 1500 rpm							
	KW	Da			Lfe	mm	KW	Da			Lfe	mm
		Di	di					Di	di			
56	0,09	80	40	15	45	45	0,06	80	45	15	45	
	0,12				55						55	
63	0,18	90	47	18	45	45	0,12	90	50	18	45	
	0,25				60						60	
71	0,37	110	55	20	50	50	0,25	110	66	20	50	
	0,55				65						65	
80	0,75	125	65	25	60	60	0,55	125	80	25	60	
	1,1				80						80	
90 S	1,5	135	70	30	75	75	1,1	135	80	30	75	
90 L	2,2				100						100	
100 L	3	152	80	36	90	90	2,2	152	90	36	90	
											120	
112 M	4	173	90	38	110	110	4	173	103	38	140	
132 S	5,5										90	5,5
	7,5	200	110	50	120	120	7,5	200	125	50	170	
160 M	11	240	135	55	130	130	11	240	150	55	160	
160 L	15				180						15	215
	18,5				215						215	
180 M	22	270	150	65	190	190	18,5	270	170	65	200	
180 L											22	240
200 L	30	300	170	75	200	200	30	300	190	75	250	
	37				250							
225 S		340	190	80		240	37	340	215	80	240	
225 M	45				240						45	290
250 M	55	375	215	85	240	240	55	375	240	85	290	
280 S	75	420	240	95	250	250	75	420	270	100	300	
280 M	90				300						90	360
315 S	110	500	290	115	275	275	110	500	325	115	300	
315 M	132 160				330 400						132 160	370 470
355 S	200	580	325	120	370	370	200	580	375	130	370	
	250				470						250	450
355 L	200				370		200				370	
	250				470		250				450	
	315				550		315				550	